



Yuasa Ficha Técnica

Yuasa YBX9115 - YBX9000 AGM Start Stop Plus

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Rendimiento

Tensión	12V
Capacidad (20 horas)	80Ah
Capacidad Arranque Amperios (EN1)	800A

Dimensiones

Largo	317mm
Ancho	175mm
Alto	190mm

Peso

Peso con Acido	23.2kg
----------------	--------



Características

Tipo de Caja	L4 DIN AGM
Fijación	B3
Asas	✓
Respiradero	✓
Características Semitraccion	✓
Sellada	VRLA


Tecnología

Regulador gases	✓
Tecnología	Ca/Ca VRLA
Separadores	AGM
Prueba de vuelco de VDA	✓
Carga recomendada	5A
Performance Marking	W5-C2-V3-M3

Tipo de terminal

T1


Standard DIN Post

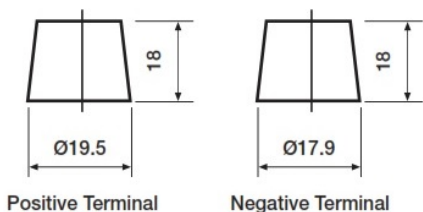

Positive Terminal

Negative Terminal

Esquema

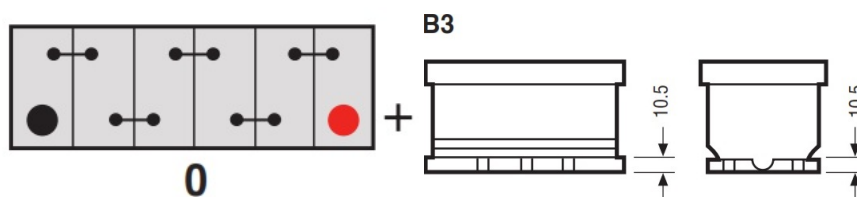

Fijación

Fecha de emisión: 22/01/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX9115 - YBX9000 AGM Start Stop Plus Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	80Ah
Cold Cranking Amps (EN1)	800A

Dimensions

Length	317mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	23.2kg
-----------------------	--------



Container Features

Case Type	L4 DIN AGM
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA
VDA Roll Over Test	AGM
Recommended Charge Rate	✓
Performance Marking	5A
	W5-C2-V3-M3

Terminal Type

T1


Standard DIN Post

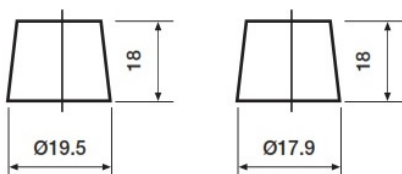


Positive Terminal

Negative Terminal

Cell Assembly Layout

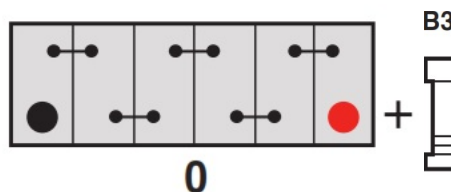

Battery Hold-down

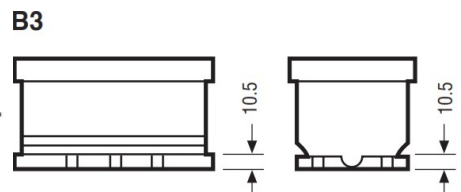

Data Sheet generated on 22/01/2024 - E&OE

